


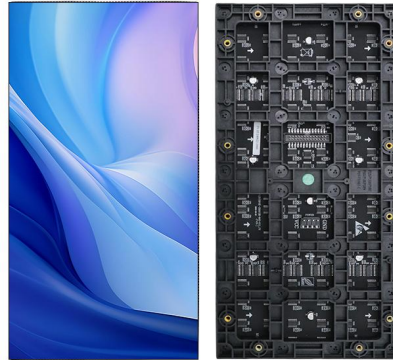

### Specification:

|                              |                                                                             |
|------------------------------|-----------------------------------------------------------------------------|
| Lamp beads                   | SMD/2020                                                                    |
| Scanning method              | 32S                                                                         |
| Pixel pitch                  | 2.5mm                                                                       |
| Pixel structure              | 1R1G1B                                                                      |
| Pixel density                | 160000/m <sup>2</sup>                                                       |
| Module resolution            | 128 (W) * 64 (H)                                                            |
| Module size                  | 320mm * 160mm                                                               |
| Main parameters              |                                                                             |
| Visible viewing distance     | ≥2.5m                                                                       |
| Horizontal viewing angle     | ≥160° Vertical viewing angle: ≥160°                                         |
| Color temperature            | 1000K-10000K adjustable                                                     |
| Flatness of the whole screen | ≤0.2mm                                                                      |
| Yes                          | Single point brightness and color correction                                |
| Brightness uniformity        | ≥99%                                                                        |
| White balance brightness     | ≥580cd/m <sup>2</sup>                                                       |
| Design                       | De-blanking drive protection circuit and high grayscale high refresh design |
| Contrast                     | ≥10000:1                                                                    |
| Refresh rate                 | ≥3840Hz                                                                     |
| Frame change frequency       | ≥60HZ                                                                       |
| Grayscale level              | 65536                                                                       |
| Drive mode                   | constant current                                                            |
| Control mode                 | synchronous                                                                 |
| Control distance             | network cable: 100 meters, optical fiber: 10 kilometers                     |
| Signal interface             | RJ45 interface                                                              |
| Brightness adjustment range  | 0 to 100 stepless adjustment                                                |
| Continuous working time      | ≥72 hours                                                                   |
| Typical life                 | 100000 hours                                                                |
| Protection level             | IP5X                                                                        |
| Installation method          | magnetic fixed installation Installation                                    |
| Electrical parameters        |                                                                             |
| Working voltage              | DC: 4.2-5V                                                                  |
| Power supply requirements    | AC: 220×(1±10%)V, 50×(1±5%)Hz                                               |

---

|                           |                                |
|---------------------------|--------------------------------|
| Maximum power consumption | ≤650W/m <sup>2</sup>           |
| Average power consumption | ≤217W/m <sup>2</sup>           |
| Environmental parameters  |                                |
| Storage temperature range | -20°C to 60°C                  |
| Working temperature range | -20°C to 50°C                  |
| Working humidity range    | 10%-80%RH without condensation |